

Date _____

Name _____

Client _____


Project name _____

Quote# _____

Type/Quantity _____

NIME 930
26411 9300

[Weblink](#)

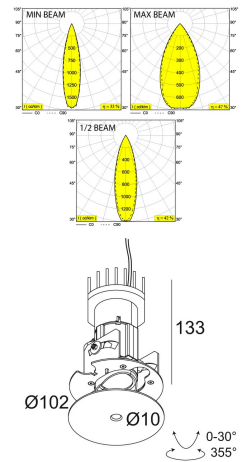

Cutout shape/size: Ø KIT mm

Recessed depth: 150 mm

Available colors: PRIMER (26411 9300 PRIM)

ADJUSTABLE 0-30°/355°
1 x LED 4,1-11,4W / CRI>90 / 3000K / 380-808lm
ADJUSTABLE BEAM 20°-50°
EXCL. LED POWER SUPPLY 900mA-DC
Other CRI or KELVIN on request

LED Technics: Light source: 808 lm // 11 W // 74 lm/W
Luminaire: 379 lm // 13 W // 29 lm/W

Class: III

Weight: 0.8 KG

Protection level: IP20


Minimum distance: n.a.

Requirements: MOUNTING KIT NIME O.F.A.
LED POWER SUPPLY 350 / 500 / 700 / 900mA-DC DIM


For detailed installation instructions, please consult the manual. [26411 XXX0 HAND.pdf](#)

NIME 930
26411 9300


Ceiling compatibility

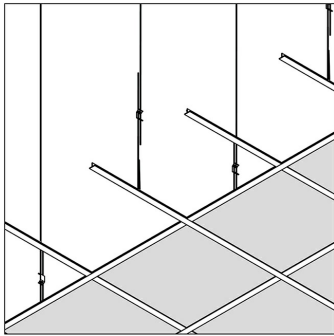


System ceiling



Plasterboard

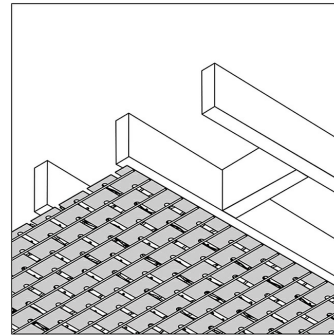


Stucanet

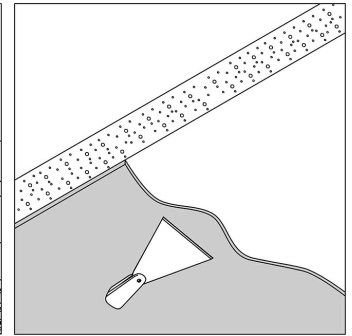

Concrete + plaster

Only with


MOUNTING KIT NIME O.F.A.



Lintel + plaster

Only with

MOUNTING KIT NIME O.F.A.



Hollow-core slab + plaster

Only with

MOUNTING KIT NIME O.F.A.

NIME 930
26411 9300

Related references
LED POWER SUPPLIES

Weblink / Specs sheet

LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9
300 90 67
Number of luminaires: 3 / 3

Weblink / Specs sheet

LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM1
300 48 350 ED1
Number of luminaires: 3


Weblink / Specs sheet

LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5
300 48 350 ED5
Number of luminaires: 3

Weblink / Specs sheet

LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W MDL
300 48 350 MDL
Number of luminaires: 3


[Weblink / Specsheet](#)



LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W WDL
300 48 350 WDL

Number of luminaires: 3


[Weblink / Specsheet](#)



LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM1
300 48 500 ED1

Number of luminaires: 3


[Weblink / Specsheet](#)



LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5
300 48 500 ED5

Number of luminaires: 3


[Weblink / Specsheet](#)



LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W MDL
300 48 500 MDL

Number of luminaires: 3


[Weblink / Specsheet](#)



LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W PRO DIM1
300 48 500 PRO ED1

Number of luminaires: 3


[Weblink / Specsheet](#)



LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W PRO DIM5
300 48 500 PRO ED5

Number of luminaires: 3


[Weblink / Specsheet](#)



LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W PRO WDL
300 48 500 PRO WDL

Number of luminaires: 3


[Weblink / Specsheet](#)



LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W MDL
300 48 500 MDL

Number of luminaires: 3


[Weblink / Specsheet](#)



LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM1
300 48 700 ED1

Number of luminaires: 3


[Weblink / Specsheet](#)



LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5
300 48 700 ED5

Number of luminaires: 3


[Weblink / Specsheet](#)



LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W MDL
300 48 700 MDL

Number of luminaires: 3


[Weblink / Specsheet](#)



LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W PRO DIM1
300 48 700 PRO ED1

Number of luminaires: 3


[Weblink / Specsheet](#)



LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W PRO DIM5
300 48 700 PRO ED5

Number of luminaires: 3


[Weblink / Specsheet](#)



LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W PRO WDL
300 48 700 PRO WDL

Number of luminaires: 3


[Weblink / Specsheet](#)



LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W WDL
300 48 700 WDL

Number of luminaires: 3


[Weblink / Specsheet](#)



LED POWER SUPPLY 350mA-DC / 10W DIM8
300 90 110

220-240V / 50-60Hz
Number of luminaires: 2 -> 2

[Weblink / Specsheet](#)




LED POWER SUPPLY 350mA-DC / 15W
300 90 91

110-240V / 0/50-60Hz

Number of luminaires: 1 -> 3 (2)

[Weblink / Specsheet](#)




LED POWER SUPPLY 350mA-DC / 16W DIM8
300 90 3112

110-240V / 50-60Hz

Number of luminaires: 2 -> 3 (3)

[Weblink / Specsheet](#)




LED POWER SUPPLY 350mA-DC / 18W DIM8
300 90 116

220-240V / 50-60Hz

Number of luminaires: 3 -> 4

[Weblink / Specsheet](#)




LED POWER SUPPLY 350mA-DC / 8W
300 90 108

110-240V / 0/50-60Hz

Number of luminaires: 1 -> 1 (1)

[Weblink / Specsheet](#)




LED POWER SUPPLY 500mA-DC / 11W DIM8
300 90 119

220-240V / 50-60Hz

Number of luminaires: 1 -> 1

[Weblink / Specsheet](#)




LED POWER SUPPLY 500mA-DC / 20W DIM8
300 90 121

220-240V / 50-60Hz

Number of luminaires: 2 -> 3

[Weblink / Specsheet](#)




LED POWER SUPPLY 500mA-DC / 21W
300 90 92

110-240V / 0/50-60Hz

Number of luminaires: 1 -> 3 (1)

[Weblink / Specsheet](#)




LED POWER SUPPLY 500mA-DC / 22W DIM8
300 90 510

110-240V / 50-60Hz


Number of luminaires: 3 -> 3 (3)

[Weblink](#) / [Specsheet](#)




LED POWER SUPPLY 700mA-DC / 17W
300 90 93
110-240V / 0|50-60Hz
Number of luminaires: 1 -> 1 (1)

[Weblink](#) / [Specsheet](#)




LED POWER SUPPLY 700mA-DC / 20W DIM8
300 90 118
220-240V / 50-60Hz
Number of luminaires: 2 -> 2

[Weblink](#) / [Specsheet](#)




LED POWER SUPPLY 700mA-DC / 36W DIM8
300 90 123
220-240V / 50-60Hz
Number of luminaires: 1 -> 3

[Weblink](#) / [Specsheet](#)




LED POWER SUPPLY MULTI POWER
21012 0010
220-240V / 0|50-60Hz
Number of luminaires: 2 -> 3 / 3 / 3 / -

[Weblink](#) / [Specsheet](#)




LED POWER SUPPLY MULTI POWER DIM1
21012 0021
220-240V / 0|50-60Hz
Number of luminaires: 4 / 4 / 3 / -

[Weblink](#) / [Specsheet](#)




LED POWER SUPPLY MULTI POWER DIM5
21012 0035
220-240V / 0|50-60Hz
Number of luminaires: 4 / 4 / 4 / -

[Weblink](#) / [Specsheet](#)




LED POWER SUPPLY MULTI-POWER COMPACT WDL
21012 005W
220-240V / 0|50-60Hz
Number of luminaires: 4 / 4 / 3 / 3

[Weblink](#) / [Specsheet](#)




LED POWER SUPPLY MULTI-POWER DIM5
300 90 68
110-240V / 0|50-60Hz
Number of luminaires: 3 (3) / 3 (2) / 3 (1) / -

[Weblink](#) / [Specsheet](#)




LED POWER SUPPLY MULTI-POWER DIM6
300 90 61
220-240V / 50-60Hz
Number of luminaires: 3 / 3 / 3 / -

[Weblink](#) / [Specsheet](#)




LED POWER SUPPLY MULTI-POWER DIM7
300 90 124
110-240V / 0|50-60Hz
Number of luminaires: 2 -> 4 (3) / 3 (2) / 2 (1) / 1 (1)

[Weblink](#) / [Specsheet](#)




LED POWER SUPPLY MULTI-POWER DIM7
300 90 64
110-240V / 0|50-60Hz
Number of luminaires: 4 (3) / 3 (2) / 3 (1) / 1 (1)

[Weblink](#) / [Specsheet](#)




LED POWER SUPPLY MULTI-POWER DIM9
300 90 63
110-240V / 0|50-60Hz
Number of luminaires: 5 (5) / 5 (5) / 5 (4) / 4 (3)

[Weblink](#) / [Specsheet](#)




LED POWER SUPPLY MULTI-POWER HV
300 90 135
220-240V / 0|50-60Hz
Number of luminaires: 4 -> 6 / 3 -> 6 / 3 -> 6 / 3 -> 5

[Weblink](#) / [Specsheet](#)




LED POWER SUPPLY MULTI-POWER HV DIM7
300 90 134
110-240V / 0|50-60Hz
Number of luminaires: 2 -> 8 (8) / 8 (6) / 6 (4) / -

[Weblink](#) / [Specsheet](#)




LED POWER SUPPLY MULTI-POWER HV DIM9
300 90 69
110-240V / 0|50-60Hz
Number of luminaires: 2 -> 8 (8) / 8 (6) / 6 (4) / -

[Weblink](#) / [Specsheet](#)



LED POWER SUPPLY MULTI-POWER MINI DIM5
300 90 125
110-240V / 0|50-60Hz
Number of luminaires: 3 (3) / 3 (2) / 2 (1) / -

[Weblink](#) / [Specsheet](#)




LED POWER SUPPLY MULTI-POWER WDL
21012 004W
110-240V / 0|50-60Hz
Number of luminaires: 5 (5) / 5 (5) / 5 (4) / 4 (3)

Related references

MOUNTING KITS NEW CONSTRUCTION

[Weblink](#) / [Specsheet](#)



MOUNTING KIT NIME O.F.A.
26410 0010